


GSF



Self centering

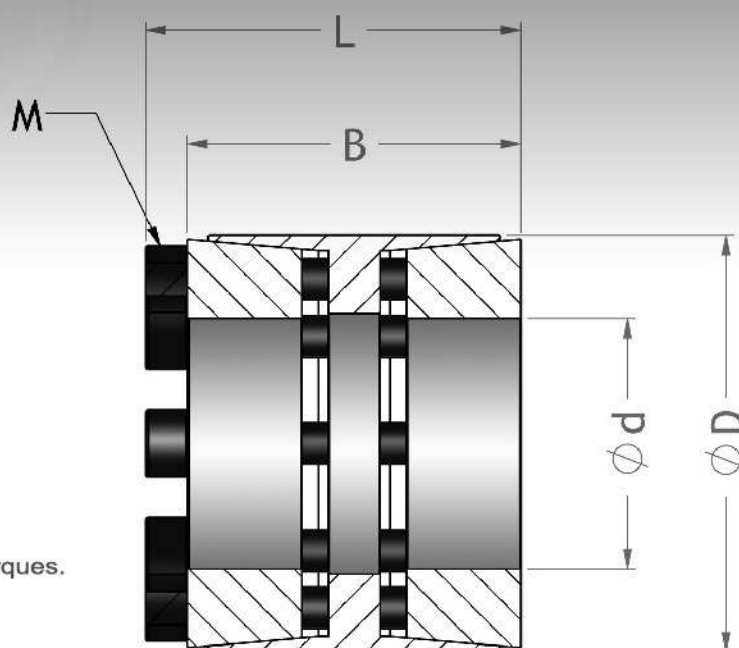

Features

- Self centering
- High torsion stiffness and response.
- Clamping element for universal use.
- Wide range of applications.
- Low-cost solution with average to high torques.

特性

- 自動對心型。
- 高扭力、高負荷。
- 廣泛的用於夾鉗式零件。
- 應用於廣泛的範圍。
- 平均高扭力的低成本解決方案。

When Ordering

請依照型錄所制訂的產品規格訂購。

When placing an order, make sure to include product no.

GSF - 80

Product No / 產品型號

Clamp power lock

unit : mm

Product No	Dimension (mm)				Clamping screws		Transmittable torque or axial force		Surface pressure between clamping sets
	d	D	B	L	M (mm)	Ts (Nm)	T (Nm)	F (KN)	P (N/mm ²)
GSF-25	25	50	45	51	M6	17	900	70	90
GSF-28	28	55	45	51	M6	17	940	70	90
GSF-30	30	55	45	51	M6	17	1100	70	90
GSF-32	32	60	45	51	M6	17	1300	70	110
GSF-35	35	60	45	51	M6	17	1600	90	110
GSF-38	38	65	45	51	M6	17	2400	90	110
GSF-40	40	65	45	51	M6	17	2400	120	110
GSF-42	42	75	45	51	M8	41	3300	150	140
GSF-45	45	75	45	51	M8	41	3300	150	140
GSF-48	48	80	64	72	M8	41	4200	160	130
GSF-50	50	80	64	72	M8	41	4200	160	130
GSF-55	55	85	64	72	M8	41	4800	170	120
GSF-60	60	90	64	72	M8	41	6200	200	120
GSF-65	65	95	64	72	M8	41	6900	210	130
GSF-70	70	110	78	88	M10	85	11500	330	130
GSF-75	75	115	78	88	M10	85	12500	330	130
GSF-80	80	120	78	88	M10	85	14500	360	130
GSF-85	85	125	78	88	M10	85	15500	400	130
GSF-90	90	130	78	88	M10	85	18100	400	130
GSF-95	95	135	78	88	M10	85	19500	400	130
GSF-100	100	145	100	112	M12	150	26500	500	130
GSF-110	110	155	100	112	M12	150	31000	600	110
GSF-120	120	165	100	112	M12	150	40000	660	120
GSF-130	130	180	116	130	M14	230	53000	800	130
GSF-140	140	190	116	130	M14	230	64000	900	110
GSF-150	150	200	116	130	M14	230	74000	1000	110
GSF-160	160	210	116	130	M14	230	84000	1050	110
GSF-170	170	225	146	162	M16	230	108000	1300	120
GSF-180	180	235	146	162	M16	230	121000	1300	120
GSF-90	190	250	146	162	M16	230	133000	1400	130
GSF-200	200	260	146	162	M16	230	144000	1400	130

> M : 公制螺絲

> Ts : 螺絲旋緊扭矩

> T.F : 在 Ts 下之傳達扭矩及軸向能力

> P : 輪轂面壓力