


GSA



Not self centering

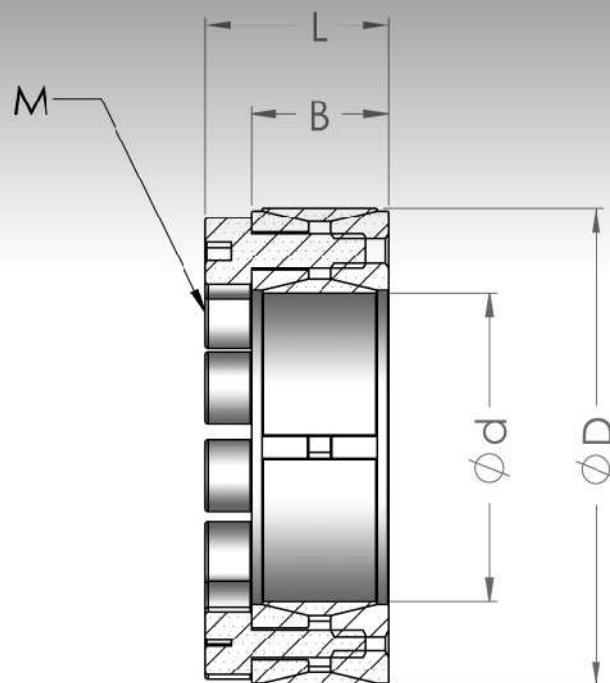

Features

- Not self centering.
- Typical clamping set.
- Axial fastening of the hub.

特性

- 非自動對心型。
- 典型的夾鉗式。
- 輪轂的軸向固定。

When Ordering

請依照型錄所制訂的產品規格訂購。

When placing an order, make sure to include product no.

GSA - 60

Product No / 產品型號

Clamp power lock

unit : mm

Product No	Dimension (mm)				Clamping screws		Transmittable torque or axial force		Surface pressure between clamping sets
	d	D	B	L	M (mm)	Ts (Nm)	T (Nm)	F (KN)	P (N/mm ²)
GSA-20	20	47	20	26	M6	14	270	27	90
GSA-22	22	47	20	26	M6	14	300	27	90
GSA-24	24	50	20	26	M6	14	360	30	95
GSA-25	25	50	20	26	M6	14	380	30	95
GSA-28	28	55	20	26	M6	14	470	34	100
GSA-30	30	55	20	26	M6	14	500	34	100
GSA-32	32	60	20	26	M6	14	650	41	110
GSA-35	35	60	20	26	M6	14	700	41	110
GSA-38	38	65	20	26	M6	14	880	45	110
GSA-40	40	65	20	26	M6	14	950	47	110
GSA-42	42	75	24	32	M8	35	1600	75	130
GSA-45	45	75	24	32	M8	35	1700	75	130
GSA-48	48	80	24	32	M8	35	1800	75	120
GSA-50	50	80	24	32	M8	35	1900	75	120
GSA-55	55	85	24	32	M8	35	2300	85	130
GSA-60	60	90	24	32	M8	35	2500	85	120
GSA-65	65	95	24	32	M8	35	3000	95	130
GSA-70	70	110	28	38	M10	69	4800	130	130
GSA-75	75	115	28	38	M10	69	5000	130	130
GSA-80	80	120	28	38	M10	69	5300	130	130
GSA-85	85	125	28	38	M10	69	6400	150	140
GSA-90	90	130	28	38	M10	69	6500	160	140
GSA-95	95	135	28	38	M10	69	8000	170	140
GSA-100	100	145	33	45	M12	120	9700	190	140
GSA-110	110	155	33	45	M12	120	10600	200	130
GSA-120	120	165	33	45	M12	120	13000	210	130
GSA-130	130	180	38	50	M12	120	18000	270	120
GSA-140	140	190	38	50	M12	120	21000	300	120
GSA-150	150	200	38	50	M12	120	24000	320	120
GSA-160	160	210	38	50	M12	120	28000	350	130
GSA-170	170	225	44	58	M14	190	33000	380	120
GSA-180	180	235	44	58	M14	190	38000	420	120
GSA-190	190	250	52	66	M14	190	46000	480	110
GSA-200	200	260	52	66	M14	190	53000	530	120
GSA-220	220	285	56	72	M16	295	68000	620	120
GSA-240	240	305	56	72	M16	295	86000	710	130

> M : 公制螺絲

> Ts : 螺絲旋緊扭矩

> T.F : 在 Ts 下之傳達扭矩及軸向能力

> P : 輪轂面壓力