


GSB



Self centering

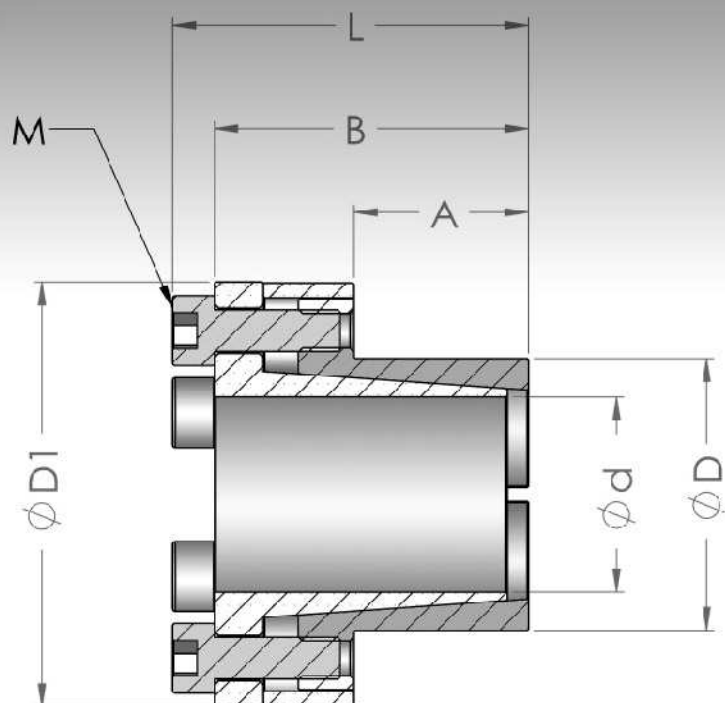

Features

- Self centering
- Clamping set specifically suitable for hubs with a small thickness.
- Reduction of costs by saving material.
- Short assembly times.

特性

- 自動對心型。
- 夾鉗式適用於小密度的輪轂。
- 降低成本，節省材料。
- 減短安裝時間。

When Ordering

請依照型錄所制訂的產品規格訂購。

When placing an order, make sure to include product no.

GSB - 35

Product No / 產品型號

Clamp power lock

unit : mm

Product No	Dimension (mm)						Clamping screws		Transmittable torque or axial force		Surface pressure between clamping sets
	d	D	D1	A	B	L	M (mm)	Ts (Nm)	T (Nm)	F (KN)	P (N/mm ²)
GSB-08	8	15	27	12	25	29	M4	5	29	10	205
GSB-09	9	16	28	14	26	30	M4	5	44	10	185
GSB-10	10	16	28	14	26	30	M4	5	49	10	185
GSB-11	11	18	32	14	26	30	M4	5	53	10	185
GSB-12	12	18	32	14	26	30	M4	5	58	10	160
GSB-13	13	23	38	14	26	30	M4	5	63	10	140
GSB-14	14	23	38	14	26	30	M4	5	68	10	130
GSB-15	15	24	45	16	36	42	M6	17	127	17	185
GSB-16	16	24	45	16	36	42	M6	17	136	17	175
GSB-17	17	26	47	18	38	44	M6	17	180	22	190
GSB-18	18	26	47	18	38	44	M6	17	200	22	160
GSB-19	19	27	49	18	38	44	M6	17	220	22	160
GSB-20	20	28	49	18	38	44	M6	17	220	22	170
GSB-22	22	32	54	25	45	51	M6	17	250	22	120
GSB-24	24	34	56	25	45	51	M6	17	270	22	120
GSB-25	25	34	56	25	45	51	M6	17	280	22	120
GSB-28	28	39	61	25	45	51	M6	17	500	35	150
GSB-30	30	41	62	25	45	51	M6	17	530	35	150
GSB-32	32	43	65	30	50	56	M6	17	750	45	150
GSB-35	35	47	69	30	50	56	M6	17	850	48	140
GSB-38	38	50	72	30	50	56	M6	17	930	48	140
GSB-40	40	53	75	30	50	56	M6	17	980	48	130
GSB-42	42	55	78	40	65	73	M8	41	1000	48	130
GSB-45	45	59	85	40	65	73	M8	41	1900	84	130
GSB-48	48	62	87	45	70	78	M8	41	2000	84	140
GSB-50	50	65	92	45	70	78	M8	41	2700	110	130
GSB-55	55	71	98	50	75	83	M8	41	3000	110	130
GSB-60	60	77	104	50	75	83	M8	41	3300	110	130
GSB-65	65	84	111	50	75	83	M8	41	3600	110	130
GSB-70	70	90	119	60	91	101	M10	83	6200	180	130
GSB-75	75	95	126	60	91	101	M10	83	6600	180	130
GSB-80	80	100	131	65	96	106	M10	83	8700	220	130
GSB-85	85	106	137	65	96	106	M10	83	9200	220	130
GSB-90	90	112	143	65	96	106	M10	83	12000	240	130
GSB-95	95	120	153	65	96	106	M10	83	12000	240	130
GSB-100	100	125	162	65	102	114	M12	145	15000	280	130

> M : 公制螺絲

> Ts : 螺絲旋緊扭矩

> T.F : 在 Ts 下之傳達扭矩及軸向能力

> P : 輪轂面壓力