

GSD



Self centering

Features

- Self centering
- Clamping element for universal use.
- Wide range of applications.
- Low-cost solution with average to high torques.


特性

- 自動對心型。
- 廣泛的用於夾鉗式零件。
- 應用於廣泛的範圍。
- 平均高扭力的低成本解決方案。

When Ordering

請依照型錄所制訂的產品規格訂購。

When placing an order, make sure to include product no.

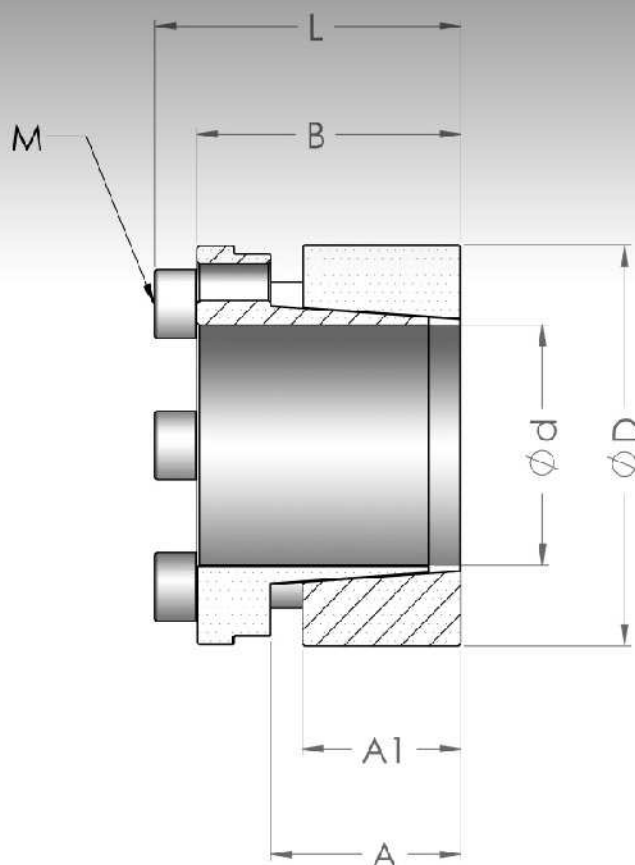

GSD - 90

Product No / 產品型號

Clamp power lock

unit : mm

Product No	Dimension (mm)						Clamping screws		Transmittable torque or axial force		Surface pressure between clamping sets
	d	D	A	A1	B	L	M (mm)	Ts (Nm)	T (Nm)	F (KN)	P (N/mm ²)
GSD-20	20	47	31	26	42	48	M6	17	550	55	100
GSD-22	22	47	31	26	42	48	M6	17	600	55	100
GSD-24	24	50	31	26	42	48	M6	17	660	55	100
GSD-25	25	50	31	26	42	48	M6	17	680	55	100
GSD-28	28	55	31	26	42	48	M6	17	720	55	100
GSD-30	30	55	31	26	42	48	M6	17	820	55	100
GSD-32	32	60	31	26	42	48	M6	17	1400	80	130
GSD-35	35	60	31	26	42	48	M6	17	1400	80	130
GSD-38	38	65	31	26	42	48	M6	17	1600	80	130
GSD-40	40	65	31	26	42	48	M6	17	1600	110	130
GSD-42	42	75	36	30	50	58	M8	41	2500	110	130
GSD-45	45	75	36	30	50	58	M8	41	2500	150	130
GSD-48	48	80	36	30	50	58	M8	41	3700	150	170
GSD-50	50	80	36	30	50	58	M8	41	3700	150	170
GSD-55	55	85	36	30	50	58	M8	41	4100	150	160
GSD-60	60	90	36	30	50	58	M8	41	4500	160	160
GSD-65	65	95	36	30	50	58	M8	41	4500	160	150
GSD-70	70	110	46	39	60	70	M10	83	8400	240	150
GSD-75	75	115	46	39	60	70	M10	83	8400	240	140
GSD-80	80	120	46	39	60	70	M10	83	9600	250	140
GSD-85	85	125	46	39	60	70	M10	83	11000	250	150
GSD-90	90	130	46	39	60	70	M10	83	13000	300	150
GSD-95	95	135	46	39	60	70	M10	83	13000	300	150
GSD-100	100	145	52	46	68	80	M12	145	17500	350	150
GSD-110	110	155	52	46	68	80	M12	145	20000	300	150
GSD-120	120	165	52	46	68	80	M12	145	21300	330	150
GSD-130	130	180	52	46	68	80	M12	145	28000	350	150
GSD-140	140	190	58.5	51	76	90	M14	190	30400	350	150
GSD-150	150	200	58.5	51	76	90	M14	190	39000	400	160
GSD-160	160	210	58.5	51	76	90	M14	190	41700	400	170
GSD-170	170	225	58.5	51	76	90	M14	190	52000	460	160
GSD-180	180	235	58.5	51	76	90	M14	190	55000	460	170

> M : 公制螺絲

> Ts : 螺絲旋緊扭矩

> T.F : 在 Ts 下之傳達扭矩及軸向能力

> P : 輪轂面壓力