

GSK / GSMA



Self centering

Features

- Self centering
- Clamping element for universal use.
- Wide range of applications.
- Low-cost solution with average to high torques.


特性

- 自動對心型。
- 廣泛的用於夾鉗式零件。
- 應用於廣泛的範圍。
- 平均高扭力的低成本解決方案。

When Ordering

請依照型錄所制訂的產品規格訂購。

When placing an order, make sure to include product no.

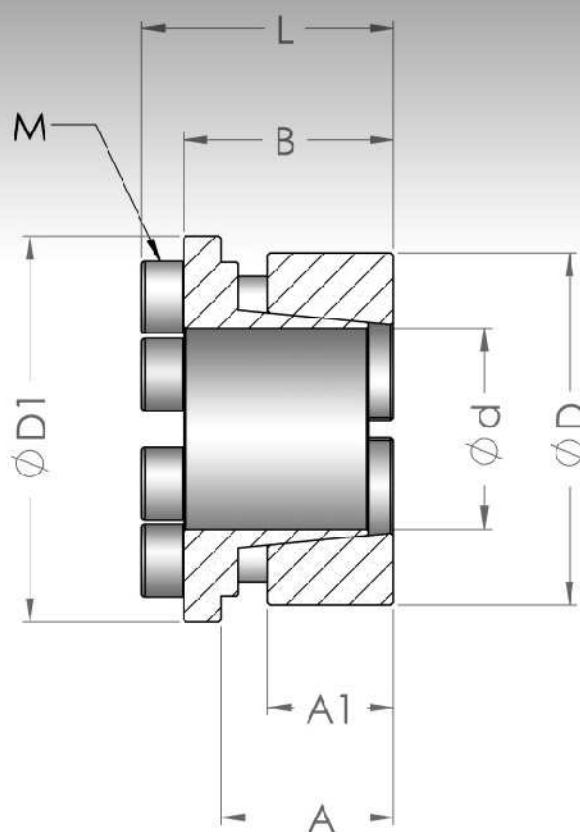

GSK - 16

Product No / 產品型號

Clamp power lock

unit : mm

Product No	Dimension (mm)							Clamping screws		Transmittable torque or axial force		Surface pressure between clamping sets
	d	D	D1	A	A1	B	L	M (mm)	Ts (Nm)	T (Nm)	F (KN)	P (N/mm ²)
GSK-10	10	23	25.5	14.5	10	16.5	20.5	M4	4.8	31.4	5.96	80
GSK-11	11	24	26.5	14.5	10	16.5	20.5	M4	4.8	34.3	5.96	77
GSK-12	12	26	28.5	14.5	10	16.5	20.5	M4	4.8	50.3	7.94	95
GSK-14	14	28	30.5	17.5	12	20	24	M4	4.8	73.3	9.90	92
GSK-15	15	29	31.5	17.5	12	20	24	M4	4.8	94.1	11.9	107
GSK-16	16	30	32.5	17.5	12	20	24	M4	4.8	101	11.9	103
GSK-17	17	31	33.5	17.5	12	20	24	M4	4.8	107	11.9	100
GSK-18	18	32	34.5	17.5	12	20	24	M4	4.8	113	11.9	97
GSK-19	19	33	35.5	17.5	12	20	24	M4	4.8	120	11.9	94
GSMA-20	20	38	42	21.1	15.3	24.1	29.1	M5	8.8	21.6	21.6	130
GSMA-22	22	40	44	21.1	15.3	24.1	29.1	M5	8.8	25.5	22.6	117
GSMA-24	24	42	46	22.1	16.3	25.1	30.1	M5	8.8	36.3	29.9	111
GSMA-25	25	43	47	23.1	17.3	26.1	31.1	M5	8.8	39.2	31.4	102
GSMA-28	28	46	50	23.1	17.3	26.6	31.6	M5	8.8	44.1	31.4	119
GSMA-30	30	48	52	23.1	17.3	26.6	31.6	M5	8.8	50.0	33.3	114
GSMA-32	32	50	54	24.1	18.3	27.6	32.6	M5	8.8	53.0	33.3	104
GSMA-35	35	57	62	26	19.5	30	36	M6	15.7	88.3	47.6	114
GSMA-38	38	60	65	26.5	20	30.5	36.5	M6	15.7	102.0	49.4	132
GSMA-40	40	62	67	27	20.5	31	37	M6	15.7	107.9	50.3	124
GSMA-42	42	64	69	27	20.5	31	37	M6	15.7	115.7	51.5	120
GSMA-45	45	67	72	27.5	21	31.5	37.5	M6	15.7	128.5	56.9	112
GSMA-48	48	70	75	27.5	21	32	38	M6	15.7	140.2	58.4	129
GSMA-50	50	72	77	28	21.5	32.5	38.5	M6	15.7	170.5	68.2	143
GSMA-55	55	77	83	28	21.5	32.5	38.5	M6	15.7	188.3	68.5	133
GSMA-60	60	82	87	28.5	22	33.5	39.5	M6	15.7	210.8	68.7	131
GSMA-65	65	87	92	28.5	22	33.5	39.5	M6	15.7	223.6	68.7	124
GSMA-70	70	97	103	31.1	24	36.1	44.1	M8	37.3	328.5	93.2	169
GSMA-75	75	102	108	31.1	24	36.1	44.1	M8	37.3	374.6	99.1	172
GSMA-80	80	107	113	32.1	25	37.1	45.1	M8	37.3	412.9	103	158
GSMA-85	85	112	118	32.1	25	37.1	45.1	M8	37.3	452.1	106	151

> M : 公制螺絲

> Ts : 螺絲旋緊扭矩

> T.F : 在 Ts 下之傳達扭矩及軸向能力

> P : 輪轂面壓力