

GSDS



Self centering

Features

- Self centering.
- Clamping set for universal applications.
- Short dimensions.
- Short assembly times.


特性

- 自動對心型。
- 廣泛的用於夾鉗式零件。
- 短尺寸。
- 減短安裝時間。

When Ordering

請依照型錄所制訂的產品規格訂購。

When placing an order, make sure to include product no.

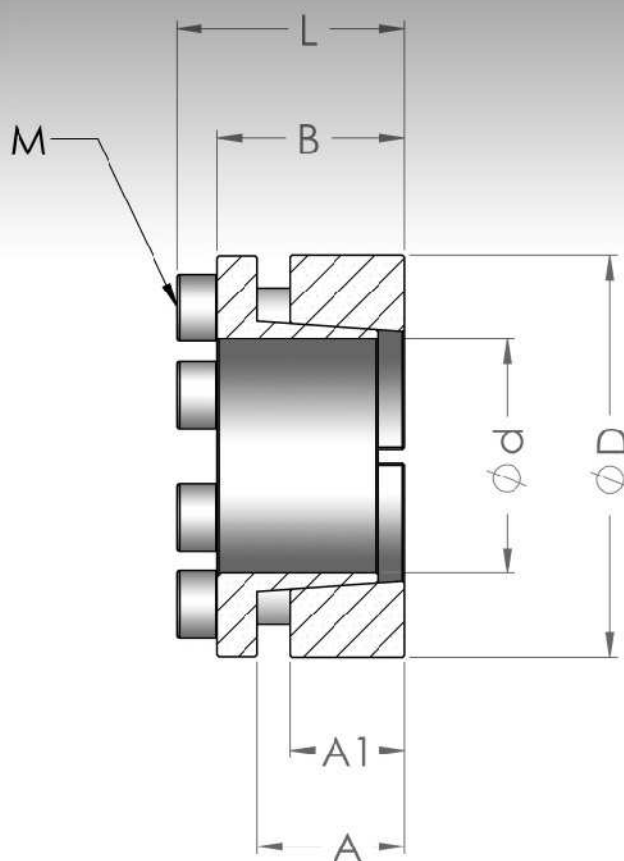

GSDS - 30

Product No / 產品型號

Clamp power lock

unit : mm

Product No	Dimension (mm)						Clamping screws		Transmittable torque or axial force		Surface pressure between clamping sets
	d	D	A	A1	B	L	M (mm)	Ts (Nm)	T (Nm)	F (KN)	P (N/mm ²)
GSDS-06	6	19	10.5	8	13.5	16.5	M3	2.3	6.2	4	53
GSDS-08	8	22	13	10	17	21	M3	3.9	18	4.7	70
GSDS-09	9	23	13	10	17	21	M3	3.9	21	4.7	68
GSDS-10	10	24	13	10	17	21	M3	3.9	30	6.2	87
GSDS-11	11	25	13	10	17	21	M3	3.9	34	6.2	84
GSDS-12	12	26	13	10	17	21	M3	3.9	47	7.8	100
GSDS-13	13	27	13	10	17	21	M3	3.9	50	7.8	97
GSDS-14	14	31	16	12.5	21	26	M4	8	70	10	87
GSDS-15	15	32	16	12.5	21	26	M4	8	75	10	84
GSDS-16	16	33	16	12.5	21	26	M4	8	80	10	81
GSDS-17	17	34	16	12.5	21	26	M4	8	105	12.5	99
GSDS-18	18	35	16	12.5	21	26	M4	8	110	12.5	96
GSDS-19	19	47	22	17	28	34	M6	14	290	30	100
GSDS-20	20	47	22	17	28	34	M6	14	320	32	100
GSDS-22	22	47	22	17	28	34	M6	14	320	32	100
GSDS-24	24	50	22	17	28	34	M6	14	360	32	100
GSDS-25	25	50	22	17	28	34	M6	14	420	34	100
GSDS-28	28	55	22	17	28	34	M6	14	500	34	100
GSDS-30	30	55	22	17	28	34	M6	14	520	34	100
GSDS-32	32	60	22	17	28	34	M6	14	770	48	110
GSDS-35	35	60	22	17	28	34	M6	14	840	48	110
GSDS-38	38	65	22	17	28	34	M6	14	910	48	110
GSDS-40	40	65	22	17	28	34	M6	14	960	48	110
GSDS-42	42	75	25	20	33	41	M8	35	1000	65	110
GSDS-45	45	75	25	20	33	41	M8	35	1500	65	110
GSDS-48	48	80	25	20	33	41	M8	35	2000	85	140
GSDS-50	50	80	25	20	33	41	M8	35	2100	85	140
GSDS-55	55	85	25	20	33	41	M8	35	2500	95	140
GSDS-60	60	90	25	20	33	41	M8	35	2700	90	130
GSDS-65	65	95	25	20	33	41	M8	35	3200	100	140
GSDS-70	70	110	30	24	40	50	M10	70	4900	140	140
GSDS-75	75	115	30	24	40	50	M10	70	5300	140	130
GSDS-80	80	120	30	24	40	50	M10	70	5600	140	130
GSDS-85	85	125	30	24	40	50	M10	70	6700	160	130
GSDS-90	90	130	30	24	40	50	M10	70	7100	160	130
GSDS-95	95	135	30	24	40	50	M10	70	9100	195	135
GSDS-100	100	145	32	26	44	56	M12	125	10200	200	150
GSDS-110	110	155	32	26	44	56	M12	125	10600	200	150
GSDS-120	120	165	32	26	44	56	M12	125	13000	216	140
GSDS-130	130	180	40	34	54	64	M12	125	18900	290	135
GSDS-140	140	190	40	34	54	68	M14	190	20500	333	125
GSDS-150	150	200	40	34	54	68	M14	190	25000	362	120
GSDS-160	160	210	40	34	54	68	M14	190	29000	362	130
GSDS-170	170	225	50	44	64	78	M14	190	34000	400	135
GSDS-180	180	235	50	44	64	78	M14	190	36000	400	120
GSDS-190	190	250	50	44	64	78	M14	190	47500	500	115
GSDS-200	200	265	50	44	64	78	M14	190	50000	500	140

> M : 公制螺絲

> Ts : 螺絲旋緊扭矩

> T.F : 在 Ts 下之傳達扭矩及軸向能力

> P : 輪轂面壓力