

GSES



Self centering

Features

- Self centering
- Clamping set for universal applications.
- Short dimensions.
- Short assembly times.

特性

- 自動對心型。
- 廣泛的用於夾鉗式零件。
- 短尺寸。
- 減短安裝時間。


When Ordering

請依照型錄所制訂的產品規格訂購。

When placing an order, make sure to include product no.
And stock bores (both sides) of product.

GSES - 70

Product No / 產品型號

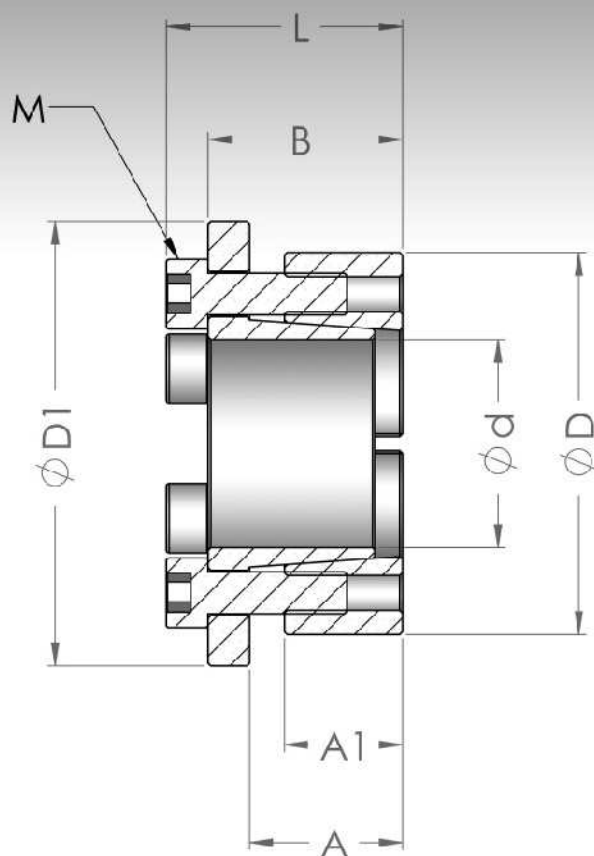

Clamp power lock

unit : mm

Product No	Dimension (mm)							Clamping screws		Transmittable torque or axial force		Surface pressure between clamping sets
	d	D	D1	A	A1	B	L	M (mm)	Ts (Nm)	T (Nm)	F (KN)	P (N/mm ²)
GSES-06	6	19	21.5	10.5	8	13.5	16.5	M3	3	6.2	4	53
GSES-08	8	22	25	13	10	17	21	M4	5	18	4.7	70
GSES-09	9	23	26	13	10	17	21	M4	5	21	4.7	68
GSES-10	10	24	27	13	10	17	21	M4	5	30	6.2	87
GSES-11	11	25	28	13	10	17	21	M4	5	34	6.2	84
GSES-12	12	26	29	13	10	17	21	M4	5	47	7.8	100
GSES-13	13	27	30	13	10	17	21	M4	5	50	7.8	97
GSES-14	14	31	34	16	12.5	21	26	M5	11	70	10	87
GSES-15	15	32	35	16	12.5	21	26	M5	11	75	10	84
GSES-16	16	33	36	16	12.5	21	26	M5	11	80	10	81
GSES-17	17	34	37	16	12.5	21	26	M5	11	105	12.5	99
GSES-18	18	35	38	16	12.5	21	26	M5	11	110	12.5	96
GSES-19	19	47	56	22	17	28	34	M6	17	290	30	100
GSES-20	20	47	56	22	17	28	34	M6	17	320	32	100
GSES-22	22	47	56	22	17	28	34	M6	17	320	32	100
GSES-24	24	50	59	22	17	28	34	M6	17	360	32	100
GSES-25	25	50	59	22	17	28	34	M6	17	420	34	100
GSES-28	28	55	64	22	17	28	34	M6	17	500	34	100
GSES-30	30	55	64	22	17	28	34	M6	17	520	34	100
GSES-32	32	60	69	22	17	28	34	M6	17	770	48	110
GSES-35	35	60	69	22	17	28	34	M6	17	840	48	110
GSES-38	38	65	74	22	17	28	34	M6	17	910	48	110
GSES-40	40	65	74	22	17	28	34	M6	17	960	48	110
GSES-42	42	75	84	25	17	33	41	M8	41	1000	65	110
GSES-45	45	75	84	25	20	33	41	M8	41	1500	65	110
GSES-48	48	80	89	25	20	33	41	M8	41	2000	85	140
GSES-50	50	80	89	25	20	33	41	M8	41	2100	85	140
GSES-55	55	85	94	25	20	33	41	M8	41	2500	95	140
GSES-60	60	90	99	25	20	33	41	M8	41	2700	90	130
GSES-65	65	95	104	25	20	33	41	M8	41	3200	100	140
GSES-70	70	110	119	30	24	40	50	M10	83	4900	140	140
GSES-75	75	115	124	30	24	40	50	M10	83	5300	140	130
GSES-80	80	120	129	30	24	40	50	M10	83	5600	140	130
GSES-85	85	125	134	30	24	40	50	M10	83	6700	160	130
GSES-90	90	130	139	30	24	40	50	M10	83	7100	160	130
GSES-95	95	135	144	30	24	40	50	M10	83	9100	195	135
GSES-100	100	145	154	32	26	44	56	M12	145	10200	200	150
GSES-110	110	155	164	32	26	44	56	M12	145	10600	200	150
GSES-120	120	165	174	32	26	44	56	M12	145	13000	216	140
GSES-130	130	180	189	40	34	54	64	M12	145	18900	290	135
GSES-140	140	190	199	40	34	54	68	M14	230	20500	333	125
GSES-150	150	200	209	40	34	54	68	M14	230	25000	362	120
GSES-160	160	210	219	40	34	54	68	M14	230	29000	362	130
GSES-170	170	225	234	50	44	64	78	M14	230	34000	400	135
GSES-180	180	235	244	50	44	64	78	M14	230	36000	400	120
GSES-190	190	250	259	50	44	64	78	M14	230	47500	500	115
GSES-200	200	260	269	50	44	64	78	M14	230	50000	500	140

> M : 公制螺絲

> Ts : 螺絲旋緊扭矩

> T.F : 在 Ts 下之傳達扭矩及軸向能力

> P : 輪轂面壓力